FBC2-THREE-PIECE BRAIDED FLEXIBLE HOSE FOR FIRE PROTECTION (DN25)

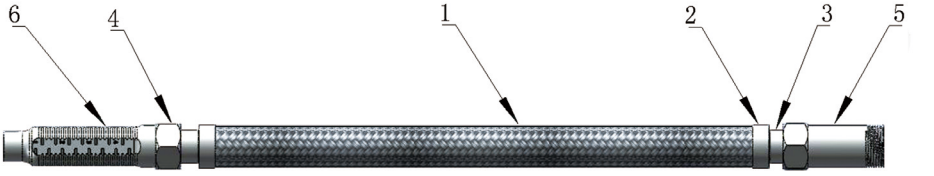

Maximum working pressure: 1.6MPa/232psi
Maximum ambient temperature: 149°C /300°F

FM APPROVED

c UL us LISTED

Material details:

Part No.	Description	Material	Quantity
1	Corrugated Pipe	Stainless Steel 304	1
2	Outer Shackle	Stainless Steel 304	2
3	Welding Ring	Stainless Steel 304	2
4	Hexagon Nut	Carbon Steel (Galvanizing)	2
5	Inlet Nipple	Carbon Steel (Galvanizing)	1
6	Outlet Nipple	Carbon Steel (Galvanizing)	1

Specifications:

Model No	Hose Assembly Length		Dimensions of inlet and outlet connections			
	IN	MM	Inlet Nipple		Outlet Nipple	
			DN	IN	DN	IN
FBC2-700	27.5	700	25	1"	15 20	1/2" 3/4"
FBC2-790	31.1	790	25	1"	15 20	1/2" 3/4"
FBC2-915	36	915	25	1"	15 20	1/2" 3/4"
FBC2-1000	39.4	1000	25	1"	15 20	1/2" 3/4"
FBC2-1200	47.2	1200	25	1"	15 20	1/2" 3/4"
FBC2-1500	59.1	1500	25	1"	15 20	1/2" 3/4"
FBC2-1800	70.9	1800	25	1"	15 20	1/2" 3/4"